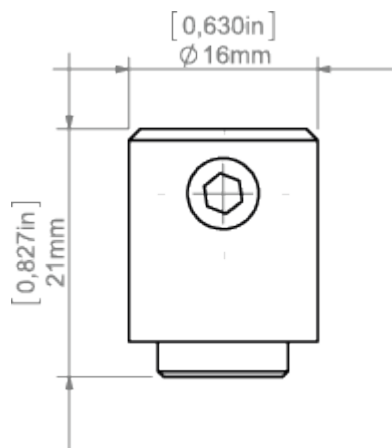


PRODUCT DESCRIPTION


Standard conductive fastener for light-weight fixtures. Power is supplied through a hole inside the fastener. One current pole is powered from one fastener that is equipped with a longitudinal hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields


Product nr.	
Fixture type	
Company	
Job name	
Date	

**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**

RELATED PROFILES




GIZA-LL profile
Ref: C0758




3035 Profile
Ref: 18039




JAZ Profile
Ref: B8547




SILER Profile
Ref: B9325



MICRO-ALU Profile
Ref: B1888



TAMI Profile
Ref: B5390




PDS-4-ALU Profile
Ref: B1718




PDS-ZM Profile
Ref: B7696



REGULOR Profile
Ref: B468+43




TEST-36 Profile
Ref: B6639




TEST-74 Profile
Ref: W4507




TETRA-43 Profile
Ref: W4476




TETRA-78 Profile
Ref: W4508



GIZA Profile
Ref: B5556




LIPOD Profile
Ref: B5554




3035-O Profile
Ref: B8441



PDS-4-PLUS
Profile
Ref: C1263



PDS-ZMG Profile
Ref: C1418



TAPO Profile
Ref: C1919

RELATED PRODUCTS


ACCESSORIES




100 PUSZ brass
chrome Rod 1 m
Ref: 42518



Brass chrome FI-3
Rod 1m
Ref: 42501



Steel FI-3 Rod 53
cm
Ref: 1528



Steel cable with
Cu FI 0.95 mm
core
Ref: 70240



Steel wire FI-1 1m
Ref: 1397