


PRODUCT DESCRIPTION

- Can create a line of light
- After mounting aluminum flanges are concealed


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

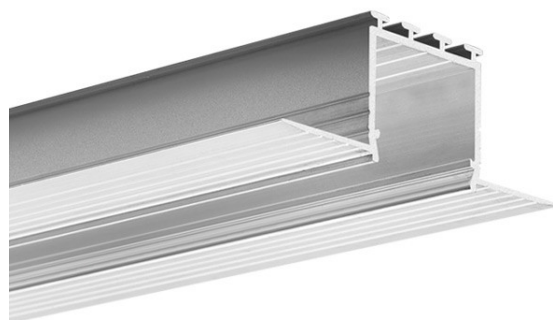


TECHNICAL SPECIFICATION

B6454NA_1	Non anodized (raw)	1000 mm
B6454NA_2	Non anodized (raw)	2000 mm
B6454NA_3	Non anodized (raw)	3000 mm

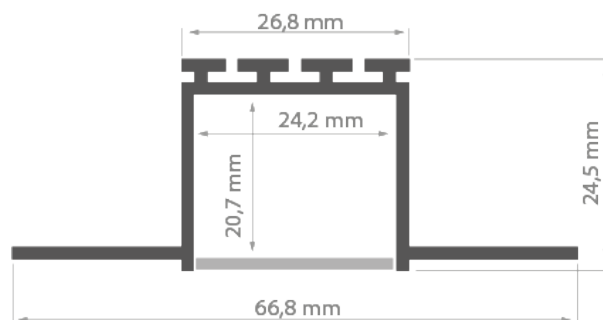

RELATED PRODUCTS

COVERS




Ref: 17042

60°




Ref: 17032V1

110°



Ref: 17022

70°




Ref: 17011

100°




END CAPS




Ref: 24034


ACCESSORIES




Ref: 42750




Ref: 42749




Ref: 17124




Ref: 42748




Ref: 42746




Ref: 42747




Ref: 42744




Ref: 42743




Ref: 42745




Ref: 42723




Ref: 42729




Ref: 42742




Ref: 42725




Ref: 42741




Ref: 42740



Ref: 42724



Ref: 42727




Ref: 42726

MARKETING MATERIALS




Ref: 90119M


COUPLERS - connection methods for profiles




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90