

PRODUCT DESCRIPTION

- Ability to create a line of light
- Concealed aluminum components
- Can be mounted in 16 mm thick drywall


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	




TECHNICAL SPECIFICATION

B7823NA_1	Non anodized (raw)	1000 mm
B7823NA_2	Non anodized (raw)	2000 mm
B7823NA_3	Non anodized (raw)	3000 mm

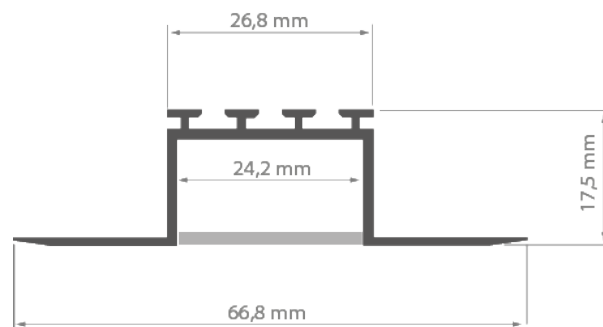


RELATED PRODUCTS


COVERS




Ref: 17042



Ref: 17032V1




Ref: 17022




Ref: 17011

END CAPS




Ref: 24148


ACCESSORIES




Ref: 42750




Ref: 42749




Ref: 17124




Ref: 42748




Ref: 42746




Ref: 42747




Ref: 42744




Ref: 42743




Ref: 42745




Ref: 42723




Ref: 42729




Ref: 42742




Ref: 42741




Ref: 42724



Ref: 42740




Ref: 42727




Ref: 42726


COUPLERS - connection methods for profiles




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90